

jc715 U.S. PTO
08/30/00

NONPROVISIONAL PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

OLIFF & BERRIDGE, PLC
P.O. Box 19928
Alexandria, Virginia 22320
Telephone: (703) 836-6400
Facsimile: (703) 836-2787

Attorney Docket No.: 107179

Date: August 30, 2000

BOX PATENT APPLICATION

**NONPROVISIONAL APPLICATION TRANSMITTAL
RULE §1.53(b)**

Director of the U.S. Patent and Trademark Office
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. §1.53(b) is the nonprovisional patent application

For (Title): PRINT SYSTEM CAPABLE OF REPRINT PRINT DATA STORED IN MEMORY OF
PRINT CONTROL DEVICE

By (Inventors): Naoki HASHIMOTO and Toru TSUZUKI

- ☒ Formal drawings (Figs. 1-15; 12 sheets) are attached.
☒ A Declaration and Power of Attorney is filed herewith.
☒ An assignment of the invention to Brother Kogyo Kabushiki Kaisha is filed herewith.
☐ An Information Disclosure Statement is filed herewith.
☐ A statement to establish small entity status under 37 C.F.R. §§1.9 and 1.27 is filed herewith.
☐ A Preliminary Amendment is filed herewith.
☐ Please amend the specification by inserting before the first line the sentence --This nonprovisional application claims the benefit of U.S. Provisional Application No. _____, filed _____.--
☒ Priority of foreign applications No. 11-245908 filed August 31, 1999 in Japan and No. 11-263518 filed September 17, 1999 in Japan are claimed (35 U.S.C. §119).
☐ A certified copy of the above corresponding foreign application(s) is filed herewith.
☒ The filing fee is calculated below:

**CLAIMS IN THE APPLICATION AFTER ENTRY OF
ANY PRELIMINARY AMENDMENT NOTED ABOVE**

FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	27 - 20	= 7
INDEP CLAIMS	4 - 3	= 1
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED		

* If the difference is less than zero, enter "0".

SMALL ENTITY


RATE	FEE
	\$ 345
x 9 =	\$
x 39 =	\$
+130 =	\$
TOTAL	\$

**OTHER THAN A
SMALL ENTITY**

RATE	FEE
	\$ 690
x 18	\$ 126
x 78	\$ 78
+260	\$
TOTAL	\$ 894

- ☒ Check No. 111477 in the amount of \$894 to cover the filing fee is attached. Except as otherwise noted herein, the Director is hereby authorized to charge any other fees that may be required to complete this filing, or to credit any overpayment, to Deposit Account No. 15-0461. Two duplicate copies of this sheet are attached.
☐ This application is entitled to small entity status. DO NOT charge large entity fees to our Deposit Account.

Respectfully submitted,



James A. Oliff
Registration No. 27,075

Mario A. Costantino
Registration No. 33,565

Inventor Information

Inventor One Given Name:: Naoki
Family Name:: HASHIMOTO
Name Suffix::
City of Residence:: Nagoya-shi
State or Prov. of Residence::
Country of Residence:: Japan
Inventor Two Given Name:: Toru
Family Name:: TSUZUKI
Name Suffix::
City of Residence:: Okazaki-shi
State or Prov. of Residence::
Country of Residence:: Japan
Inventor Three Given Name::
Family Name::
Name Suffix::
City of Residence::
State or Prov. of Residence::
Country of Residence::
Inventor Four Given Name::
Family Name::
Name Suffix::
City of Residence::
State or Prov. of Residence::
Country of Residence::
Inventor Five Given Name ::
Family Name::
Name Suffix::
City of Residence::
State or Prov. of Residence::
Country of Residence::

Correspondence Information

Name Line One:: Oliff & Berridge PLC
Address Line One:: P.O. Box 19928
City:: Alexandria
State or Province:: VA
Postal or Zip Code:: 22320
Telephone:: (703) 836-6400
Fax:: (703) 836-2787
Electronic Mail:: commcenter@oliff.com

Application Information

Title Line One:: PRINT SYSTEM CAPABLE OF REPRINT
Title Line Two:: PRINT DATA STORED IN MEMORY OF PRINT
Title Line Three:: CONTROL DEVICE
Title Line Four::

Total Drawing Sheets:: 12
Docket Number:: 107179

Continuity Information

>This application is a::
Application One::
Filing Date::
Patent Number::
which is a::
>>Application Two::
Filing Date::
Patent Number::

Prior Foreign Applications

Foreign Application One:: 11-245908
Filing Date:: August 31, 1999
Country:: Japan
Priority Claimed:: Yes
Foreign Application Two:: 11-263518
Filing Date:: September 17, 1999
Country:: Japan
Priority Claimed:: Yes
Foreign Application Three::
Filing Date::
Country::
Priority Claimed::

5 1. Field of the Invention

10

2. Description of the Related Art

15

20

easily select a desired print data set, conventional print systems include a searching function for efficiently searching a print data set from all print data sets stored in the memory of the printer. In one example, a conventional printer reduces each print data set by a predetermined reduction rate and prepares a reduced print data set accordingly. The printer displays or prints out the reduced print data sets, so the user can select a desired print data set after visually confirming the contents of the print data sets.

However, the printer requires a certain amount of time to prepare such reduced print data. The burden placed on the printer is especially great, when the printer receives a large number of print data sets from client devices in a large print system. As a result, the reduced print data can take an extremely long time to prepare before the user can actually visually confirm the contents of the print data sets.

Although the amount of data can be reduced by increasing the reduction rate, the quality of the resultant display or printout will be poor, so the user will have difficulty in visually confirming the content of the print data sets.

There has been also known a conventional network printer including a reprint switch. When the reprint switch

is pressed by a user, then the printer reprints out the last page of the print data set that was most recently stored in the memory of the printer.

Although these conventional printers can reprint all
5 pages of a selected print data set or the last page of the
last stored print data set, they cannot reprint the
particular page of a particular print data set, such as only
table contents of a selected print data set. Accordingly,
when a user desires to reprint only such a particular page
10 of a print job, the user must either operate the printer to
reprint all pages of the print job or resend only data for
the particular page to the printer.

SUMMARY OF THE INVENTION

It is an objective of the present invention to solve the above-described problems and also to provide a print system capable of displaying images relating to print job in a short period of time to enable a user to easily select a desired print job from a plurality of print jobs stored in a memory of a printer.

20 It is another objective of the present invention to provide a printer capable of reprinting only desired pages of a print job stored in the memory of a printer.

It is also objective of the present invention to provide a storing medium storing programs of and a method of
25 controlling a print system to display images relating to

and a printer engine that prints out only the at least one of the plurality of pages selected by the user.

Further, there is provide a method of controlling a print system including a client device dealing with print data and a print control device connected to the client device. The method includes the steps of a) setting related data for the print data, b) transmitting the related data and the print data from the client device to the print control device, c) storing the related data and the print data in correspondence with each other into a memory of the print control device, d) outputting the related data stored in the memory when requested by a user.

There is also provided a medium storing programs used in a print system including a client device and a print control device connected to the client device. The programs includes the programs of a) setting related data to the print data, b) transmitting the related data and the print data from the client device to the print control device, c) storing the related data and the print data in correspondence with each other into a memory of the print control device, and d) outputting the related data stored in the memory when requested by a user.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings:

Fig. 1 is a block diagram showing a print system

according to a first embodiment of the present invention;

Fig. 2 is a flowchart representing processes executed in a computer of the print system of Fig. 1;

Fig. 3 is a flowchart representing print processes executed in a printer of the print system of Fig. 1;

Fig. 4 is a flowchart representing related data output processes executed in the printer;

Fig. 5 is a view showing a screen displayed on a display portion of either the printer or the computer of the print system of Fig. 1;

Fig. 6 is a view showing a screen displayed on the display portion of either the printer or the computer;

Fig. 7 is a block diagram showing a print system according to a second embodiment of the present invention;

Fig. 8 is a perspective view of a printer of the print system of Fig. 7;

Fig. 9 is a flowchart representing reprint processes executed in the printer;

Fig. 10 is a flowchart representing page selection processes executed in a select page process of the flowchart of Fig. 9;

Fig. 11 is a block diagram showing a print system according to a third embodiment of the present invention;

Fig. 12 is a flowchart representing page selection processes executed in a computer of the print system of Fig.

11;

Fig. 13 is a flowchart representing reprint processes executed in a printer of the print system of Fig. 11;

Fig. 14 is a view showing a screen displayed on a display portion of the computer of Fig. 11; and

Fig. 15 is a view showing a screen displayed on the display portion of the computer of Fig. 11.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Next, preferred embodiments of the present invention will be described while referring to the accompanying drawings.

First, a print system according to a first embodiment of the present invention will be described while referring to Figs. 1 to 6. As shown in Fig. 1, the print system includes a network printer 30 and a client device 40 connected via a network W. It should be noted that a plurality of client devices 40 can be connected to the network W. However, in order to facilitate explanation, only a single client device 40 is shown in Fig. 1.

As shown in Fig. 1, the network printer 30 includes a central processing unit (CPU) 31, a read only memory (ROM) 32, a random access memory (RAM) 33, a hard disk 34, a display portion 35, an input portion 36, an interface 37, and a printer engine 38. The interface 37 of the network printer 30 is connected to the network W.

The CPU 31 performs overall control of the network printer 30 and also executes various control programs. The ROM 32 stores a print control program and various parameters as fixed data. The RAM 33 temporarily stores programs and data required for various processes. The RAM 33 also temporarily stores print data and related data transmitted from the client device 40. Details for the related data will be described later.

The hard disk 34 is a memory mainly for storing print data and related data transmitted from the client device 40. The hard disk 34 includes a print data storage region 34a and a related data storage region 34b. The print data storage region 34a stores a plurality of print data sets in order for each print job. The related data storage region 34b stores a plurality of related data sets in correspondence with the print data sets.

A conversion process, such as bitmap development process, is performed for print data before the print data is stored in the print data storage region 34a. The conversion process is for converting the print data into a format that the printer engine 38 uses when printing. Alternatively, the print data can be stored in the print data storage region 34a without its format being converted. In this case, the conversion process is performed when print processes are performed for the print data.

for example, work data for a variety of programs. The memory 44 is a rewritable memory, such as hard disk. A variety of application software are installed in the memory 44.

5 The display portion 45 displays data, such as image data and related data. The display portion 45 can be a cathode ray tube (CRT) or a liquid crystal display (LCD) for example. The input portion 26 is for inputting data required for processes in the client device 40. The input
10 portion 26 can be a key board, for example.

 The interface 47 transmits data to the printer 30 and receives data from the printer 30 across the network W.

 Next, processes performed by the print system according to the present embodiment will be described while
15 referring to Figs. 2 to 4.

 Fig. 2 is a flowchart representing the processes performed by the client device 40. First in S1, print data is prepared by using a predetermined application software in the client device 40. It should be noted that print data
20 which has already been prepared can be used in S1 and the following processes.

 Next, in S2 and S3, related data relating to the print data is prepared. The related data includes one or more related image data sets, which indicate related images, and
25 a variety of different types of management data.

Specifically, in S2, related image data is prepared for each page of the print data by using either an appropriate application software or an additional function of the application software used in S1. That is, when the
5 print data includes a plurality of different pages, then a plurality of related image data sets are prepared. When the print data includes only a single page, then only a single related image data set is prepared.

It should be noted that even if the print data
10 includes a plurality of pages, only a single related image can be designated for the print data. Also, instead of preparing new images, one or a plurality of related images can be selected in S2 from various images prestored in the client device 40 .

15 The related image data can be reduced data of print data; predetermined characters, figures, or symbols that represents the print data; user name of the client device 40; or any combination of these. That is to say, any data that enables the user to grasp the correspondence between
20 the related image data and the corresponding print data can be used as the related image data.

Next, in S3, one of the related images for the print data is selected and designated as a representative image. When only one related image is prepared for the print data
25 in S2, then the related image is automatically designated as

the representative image.

Also in S2, management data is prepared for the print data. The management data indicates various management information, such as total page number, data ID, user's name, and other information. However, other different information can be displayed as well.

Next, in S4, the print data prepared in S1 and the related data prepared in S2 and S3 are transmitted across the network W to the network printer 30. At this time, the related data is appended to the print data as its header information. If the user wishes to immediately print out the print data, a print command to request print operations is also transmitted along with the print data. On the other hand, if not, the print command will not be transmitted at this time. Then, the present routine is ended.

Next, print processes performed in the network printer 30 will be described while referring to the flowchart in Fig. 3. First in S11, the network printer 30 receives the print data appended with the header information transmitted from the client device 40.

Next in S12, the related data, that is header information, is separated from the print data.

Then in S13, the CPU 31 stores the related data into the related data storage region 34b of the hard disk 34. At this time, the correspondence relationship is established

(S16:YES), then in S17, the related data stored in the related data storage region 34b is displayed on the display portion 35. Then, the process proceeds to S18. On the other hand, if not (S16:NO), then the process proceeds
5 directly to S18. It should be noted that the display in S17 can be performed using the display portion 45 of the client device 40. In this case, the related data is transmitted from the network printer 30 to the client device 40.

In S18, the CPU 31 judges whether or not a related
10 data print command has been received. The related data print command is for requesting the printer 30 to print out the related data. The related data print command is inputted by the user through either the input portion 36 or the input portion 46. When the related data print command
15 is inputted through the input portion 46 of the client device 40, the command is transmitted from the client device 40 to the network printer 30.

If the related data print command has been received (S18:YES), then in S19, the related data is printed on a
20 sheet using the printer engine 38, and the present routine is ended. On the other hand, if not (S18:NO), S19 is skipped and the present routine is ended.

Next, examples of related data screens displayed in S17 will be described while referring to Figs. 5 and 6. In
25 the example of Fig. 5, a screen 70 displays all

representative images stored in the related data storage region 34a, each designated for a corresponding print data set stored in the print data storage region 34a. The screen 70 also displays corresponding management information next to the representative images. In this example, the management information includes a user name, a data ID, a storage date, and a total page number.

A scroll bar 71 is disposed at the right edge of the screen 70. The amount of information that can be displayed on the screen 70 is restricted by the size of the screen 70. In the example of Fig. 5, the screen 70 displays representative images and manage information for only three print data sets at the same time. However, by scrolling the screen 70 using the scroll bar 71, representative images and management information for the rest of the print data sets can be displayed as well.

A page changing button 72 and a print button 73 are disposed at a lower edge of the screen 70. Each time the page changing button 72 is pressed by the user, the screen 70 displays different ones of the related images of currently selected print data set. A print data set can be selected by the user clicking on its representative image using a mouse, for example. When the user presses the print button 73, the printer engine 38 prints out the representative images and management information of either

all or selected ones of the print data sets stored in the hard disk 34.

In the example of Fig. 6, a screen 80 displays all related image and management information of the selected one of the print data sets stored in the hard disk 34.

A print job switching button 81 and a print button 82 are disposed at a lower edge of the screen 80. The print job switching button 81 is for switching the screen to display the related images and management information of the next print data set. For example, when the job switching button 81 is pressed in the situation shown in Fig. 6, then the screen will be switched to display all related images and management information for a data set "DATA B", which is the print data set following a data set "DATA A". The print button 82 is a button for printing out all related images and management information designated for the currently displayed print data set.

In the example of Fig. 6, the screen 80 displays all five related images of the data set "DATA A". However, when a print data set includes more than five pages, then a scroll bar is displayed so that sixth page and more can be displayed by scrolling beyond the fifth page.

It should be noted that the related data screen is not limited to the examples of Figs. 5 and 6. For example, a plurality of related images and management information for a

plurality of print data sets can be selectively displayed at the same time. In this case, a vertical scroll function can be provided for switching display between different print data sets. A horizontal scroll function can also be provided for switching display between different related images of the selected print data set.

With this configuration, when the user wishes to reprint a particular print data set, the user can confirm which print data he or she wishes to reprint while visually examining the related data displayed in S17 or printed out in S19. It should be noted that reprint operations are conventionally well known, so detailed explanation of the reprint operations will be omitted.

Because the related data is prepared at the client device 40, transmitted to the network printer 30, and stored in the hard disk 45 of the network printer 30 as described above, the user can make a proper visual confirmation of the print data in a short duration of time and select desired print data accordingly without having to resend any data to the network printer 30. This makes operation of the system very easy for the user. Also, printing processes can be more efficiently performed.

Because the related images can be designated in any form desired by the user, the user can designate the form that enables the user to most easily grasp the content of

the print data. Further, because a representative image is designated for each print data set, the user can even more easily grasp the content of the print data even if the print data includes a plurality of pages.

5 In the embodiment described above, the related image data is transmitted from the client device 40 to the network printer 30 as header information of print data. However, the related image data can be transmitted in a different manner or at a timing different from the corresponding print
10 data.

Also, in the present embodiment, related data can be both displayed in S17 and printed out in S19. However, the present invention can be applied to a device that only displays or prints out the related data.

15 Control programs that perform the above described processes of the present embodiment can be stored in any recording medium, such as a floppy disk or CD ROM, and can be installed into and run in the computer 40.

Next, a print system according to a second embodiment
20 of the present invention will be described while referring to Figs. 7 to 10. In the second embodiment, the present invention is applied to a print system with a computer and a printer connected to a network that uses a transmission control protocol/Internet protocol (TCP/IP) as a protocol.

25 As shown in Fig. 7, the print system according to the

present embodiment includes a plurality of computers 60, a network W, such as a telephone circuit or LAN, a plurality of network interface cards (NIC) 1, and a plurality of network printers 10.

5 Each computer 60 includes a computer body 56, a mouse 53, and a cathode ray tube (CRT) 54. The computer body 56 includes a CPU 50, a ROM 51, a RAM 52, and a hard disk 55. The hard disk 55 of the computer 60 stores word processing software for preparing text and the like for printing, and
10 printer driver software for controlling the printers 10. The printer driver software includes programs for transmitting print data. These programs have been installed into the hard disk 55 from an information memory medium, such as a floppy disk or a compact disk (CD) into a
15 condition in that the programs can run in the computer 60.

Each printer 10 includes a CPU 11, a ROM 12, a RAM 13, a bus 14, an output interface 15, a reprint switch 16, a print portion 17, a hard disk (HDD) 18, an operation switch 19, and a display portion 20. The display portion 20 is
20 formed from an LCD panel, for example. The hard disk 18 can be a PCMCIA card, which is detachably provided to the printer 10. The hard disk 18 stores print data transmitted from the computer 60, in a job unit. Information on how many print data sets are currently stored in the hard disk
25 18 is stored in the RAM 13, for example. The RAM 13 stores

a print control program. The printer 10 interprets information from the computer 60 and also performs print processes to be described below by executing the print control program.

5 As shown in Fig. 8, the reprint switch 16, the operation switch 19, and the display portion 20 are disposed on an upper panel portion of the printer 10. In this example, the display portion 20 is for displaying 16 characters. The user can select a desired print job or a
10 desired page by operating on the operation switch 16.

Each printer 10 is provided with the NIC 1 and connected to the network W in a hardware hierarchy. The NIC 1 is connected to the printer 10 through a connection line 9, which is connected to the bus 14. The NIC 1 is provided with
15 a transceiver 2, a RAM controller 3, and a bus 4.

Each NIC 1 is allotted a different IP address, which serves as distinction data. The printer 60 transmits a command with a particular IP address so that the command is transmitted to a desired one of the printers 10 connected to
20 the NIC 1.

Next, a reprint process executed in the printer 10 according to the present embodiment will be described while referring to the flowcharts in Figs. 9 and 10.

The reprint process is usually executed after
25 performing normal print operations. In this example, it is

assumed that print data has been transmitted from the computer 60 to the printer 10 and that the print operations have been completely performed based on the transmitted print data. Accordingly, the print data has been stored in
5 the hard disk 18 of the printer 10. Also, it is assumed that management data relating to the print data has been stored in the RAM 13 of the printer 10.

The reprint process of Fig. 9 is started when the user presses down the reprint key 16 of the printer 10. Once the
10 process is started, first in S21, the CPU 11 judges whether or not any print data is stored in the hard disk 18. If not (S21:NO), then this routine is ended. On the other hand, if so (S21:YES), then in S22, the CPU 11 judges whether or not a plurality of print data sets are presently stored in the
15 hard disk 18 by referring to the RAM 13 for example. If only a single print data set is being stored (S22:NO), then the routine proceeds to S24. On the other hand, if a plurality of print data sets are stored (S22:YES), then in S23, print job selection is performed. Specifically, the
20 display portion 20 displays ID numbers of all print jobs stored in the hard disk 18 and a message for urging the user to select the ID number of the desired print job. Referring to this message, the user operates the operation switch 19 to select the ID number of the desired print job that the
25 user wishes to reprint. It should be noted that an ID

number is automatically designated to each print job by the printer 10 in the order in which the print data sets are stored in the hard disk 18. Because the display portion 20 is small and capable of displaying only 16 characters as described above, a scroll can also be displayed in order for displaying ID numbers which cannot be displayed at once.

Alternatively, the ID number of the desired print job can be directly inputted by the user using the operation switch 19.

Then, the present routine proceeds to S24. In S24, it is judged whether or not the selected single print job includes a plurality of pages by referring to the management information stored in the RAM 13. If only a single page is included in the selected print job (S24:NO), then in S26, the CPU 11 retrieves the print data of the selected print job from the hard disk 18 and updates the content of a reprint page table so as to register the print data in the reprint page table. The reprint page table is a region in the RAM 13 for storing data which is the subject of reprint operations. It should be noted that if the exact same print data is already stored in the reprint page table, then the CPU 11 does not update the content of the reprint page region. Then, the routine proceeds to S27. If the selected print job includes a plurality of pages (S24:YES), then page selection processes are executed in S25, and the present

routine proceeds to S27.

The page selection processes executed in S25 will be described while referring to the flowchart of Fig. 10. First, in S30, the CPU 11 controls the display portion 20 to display a message urging the user to indicate whether he or she wishes to select a particular page of the selected job. If the user indicates through the operation switch 19 that he or she does not wish to select a particular page (S30:NO), then in S37, the CPU 11 retrieves print data for all pages of the selected print job from the hard disk 18, and updates the content of the reprint page table so as to register the print data into the reprint page table. At this time also, if the exact same print data is currently stored in the reprint page table, then it is unnecessary to update the content of the reprint page table. Then, the routine is ended.

On the other hand, if the user indicates he or she wishes to select a particular page of the selected print job (S30:YES), then in S31, the CPU 11 clears the reprint page table. Next, in S32, the user selects a desired page of the print job and inputs the page number of the desired page. Because the reprint process is usually performed after a normal printout operation, the user will normally have all printed pages, so the user can select the desired page while freely referring to these printed pages.

later on, the user will not have to again indicate the desired pages for the print data, so the user's operations can be even more efficient.

5 Once the page selection is completed in S25, then in S27 of the flowchart in Fig. 9, the CPU 11 retrieves the print data registered in the reprint page table and outputs the print data to the print portion 17. The print portion 17 then reprints out the print data, and the present routine is ended.

10 With the above-described configuration, the user can have the printer reprint only those pages that he or she desires to be printed in the order he or she desires. Therefore, the print processes can be more efficiently performed.

15 It should be noted that the printer 10 can be configured so that data stored in the reprint data table is automatically erased each time a fixed duration of time has elapsed or at a time indicated by a user.

20 Although the present embodiment described printers and computers connected to a network, the printers and computers can be connected directly to each other by a cable, for example.

25 Also, the related data control means of the first embodiment can be used in the configuration of the second embodiment. That is to say, related data including

management data and related image data can be prepared at the computer 60 and then stored in correspondence with the print data in the hard disk 18 of the printer 10. By displaying or outputting the related data in accordance with the needs of the user, then the job selection of S23 and page selection of S25 can be more easily performed. Because the related data that has already been stored can be effectively used, the user can visually confirm the print data in a short period of time in order to facilitate a selection of the print data. Therefore, the print processes are more efficient. In this case, it is desirable that the printer be provided with the display portion large enough to display the screen 70, 80 shown in Fig. 5. 6.

Next, a third embodiment of the present invention will be described while referring to Figs. 11 to 15. It should be noted that components that are common to both the second and third embodiments will be assigned with the same numbering and their explanation will be omitted.

The present embodiment describes the present invention applied to a print system with a host computer and a printer connected by a network wherein the network is managed by World Wide Web (WWW) protocol. The WWW protocol is used in an information network that access to a variety of information by building a program called hyper text on the network.

Here, brief outline for the WWW protocol will be described. WWW is an information system for managing a network managing information of a variety of terminal devices, such as printers, in a unified manner at another
5 computer. The computer is installed with a program called a WWW browser, which enables the computer to serially browse setting conditions for each terminal device one at a time. The computer the such information to control the network.

In each of these terminal devices, images, and
10 character information are expressed using hypertext. Hypertext program uses a language called hypertext markup language (HTML). A hyper text transfer protocol (HTTP) is used as a protocol for communicating between the computers and terminal devices.

15 In the present embodiment, a common gateway interface (CGI) 12a is installed as a program in the ROM 12 of the printer 10 as shown in Fig. 11. The CGI 12a configures HTML that corresponds to a command from the computer 60 and interprets information called form which is generally
20 transmitted from the computer 60. For example, when the user of the computer 60 sets the number of sheets to be printed to 5, the computer 60 will transmit the form "COPIES=5" to the CGI 12a of the printer 10.

Each computer 60 and printer 10 is assigned with
25 distinction information called a uniform resource locator

for various operations relating to printing, such as for printer selection and print operations for example, and the user can select a desired operation by pressing the corresponding button.

5 When the user presses any one of the buttons on the print dialog, then in S41, it is judged whether or not the user has pressed a button for a reprint operation. If not (S41:NO), then the routine proceeds to S47 and selected operation other than reprint operation is executed. On the
10 other hand, if so (S41:YES), then in S42, the CPU 50 transmits a related data request command to the printer 10 for requesting the printer 10 to transmit all related data spooled in the hard disk 18 of the printer 10.

15 In S43, the CPU 50 of the computer 60 receives the related data from the printer 10 and displays a reprint process display screen 100 shown in Fig. 14 on the CRT 54 based on the received related data. The display screen 100 displays representative images of each print job as thumbnails 110a, 110b, 110c, and also displays corresponding
20 management information next to the thumbnails 110a to 110c. If the display screen 100 cannot display all representative images and management information at one time, then the user can view all the representative images and management information by dragging a scroll bar 101 or clicking a next
25 page button 102.

are also transmitted to the printer 10, and the present routine returns to S40.

Next, the reprint routine executed in the printer 10 will be described while referring to the flowchart of Fig.

5 13. First, the CPU 11 determines whether or not any command is received from the computer 60. If not (S50:NO), the CPU 11 waits until a command is received. If so (S50:YES), then in S51, the CPU 11 judges whether or not the command is a related data request command. If so (S51:YES), then in S52, 10 the CPU 11 retrieves all related data from the hard disk 18. Then in S53, the CPU 11 transmits the related data to the computer 60. Then, the routine returns to S50.

If the received command is not a related data request command (S51:NO), then in S54, the CPU 11 judges whether or 15 not the command is a reprint command. If so (S54:YES), then in S55, CPU 11 receives data ID and selected page numbers of the selected job from the computer 60. Next in S56, the CPU 11 updates the reprint page table of the hard disk 18 based on the data received in S55 in the same manner as in the 20 second embodiment. Next in S57, the CPU 11 performs the reprint process while referring to the content of the reprint page table. Then, the routine returns to S50.

If the received command is not a reprint command (S54:NO), the routine proceeds to S58, wherein other 25 processes corresponding to the received command are

What is claimed is:

1. A print system comprising:

5 a client device that deals with print data, the client device including related data setting unit that sets related image data for the print data, and a transmission unit that transmits the print data and the related image data; and

10 a print control device connected to the client device, the print control device including a receiving unit that receives the print data and the related image data from the client device, and a memory that stores the print data and the related image data in correspondence with the print data, wherein at least one of the client device and the print control device includes an output unit that outputs the related image data when requested by a user.

15 2. The print system according to claim 1, wherein the output unit includes at least one of a display that displays the related image data and a printer engine that prints out the related image data stored in the memory of the print control device.

20 3. The print system according to claim 1, wherein the related data setting unit sets at least one set of related image data for one set of print data.

25 4. The print system according to claim 3, wherein the related data setting unit selects one of the at least one set of related image data as representative image data, and

correspondence with each other into a memory of the print control device; and

d) outputting the related data stored in the memory when requested by a user.

5 15. The method according to claim 14, wherein the related data that is set in the setting step a) includes a plurality of related image data sets, each for one of a plurality of pages for the print data.

16. The method according to claim 15, wherein one of
10 the plurality of related image data is set as representative
image data in the setting step a).

17. The method according to claim 14, further comprising the steps of:

e) selecting at least one page of a plurality of pages
15 of the print data; and

f) printing out only the at least one page selected in the selecting step e).

18. The method according to claim 17, further comprising the step of g) erasing print data for pages which have not been selected in the selecting step e) from the memory.

19. The method according to claim 14, wherein the related data is outputted to any one of a printer engine and a display in the outputting step d).

25 20. The method according to claim 14, wherein the

FIG. 1

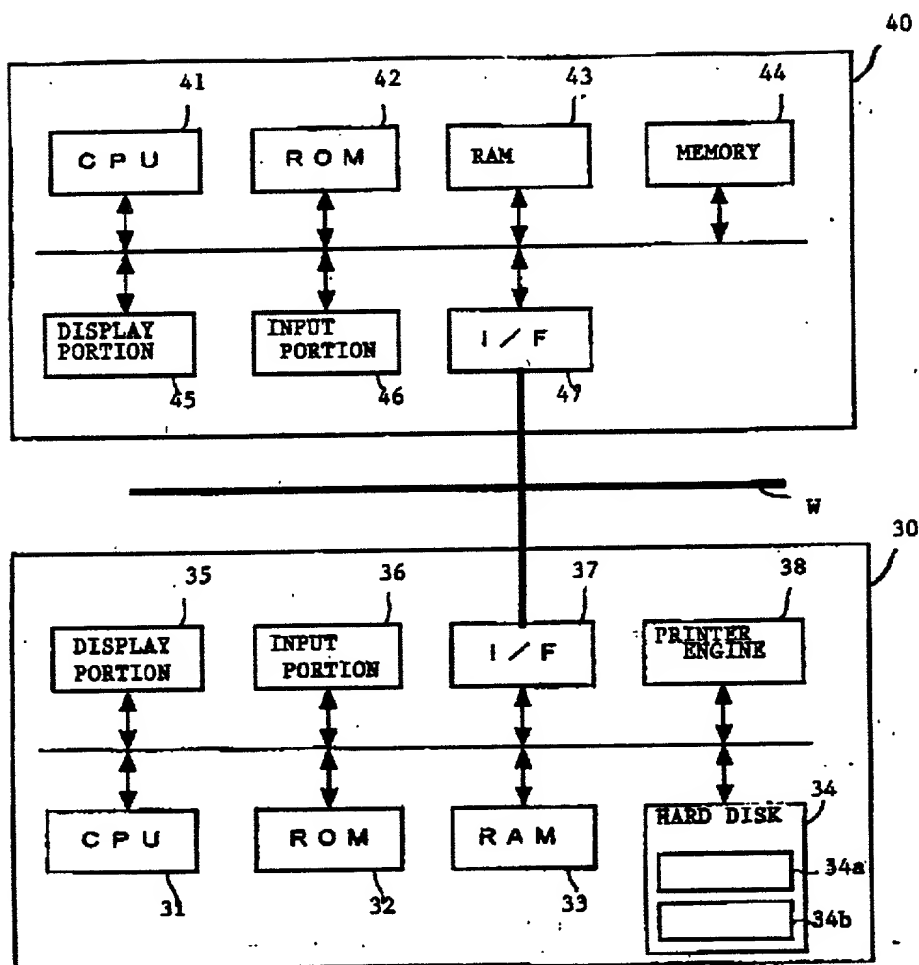


FIG. 2



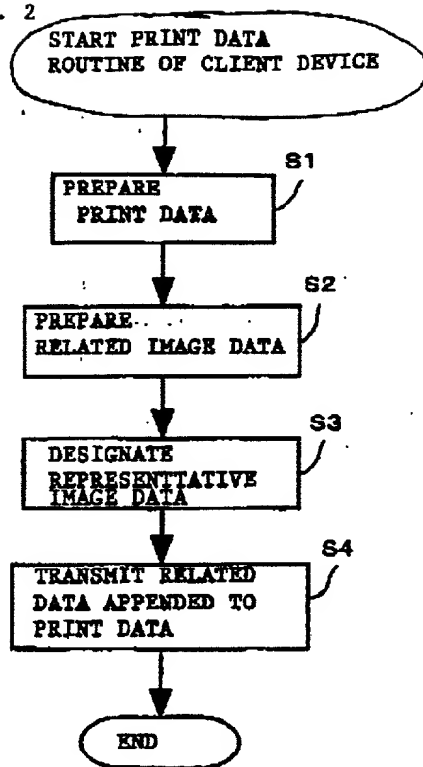


Table 1. Demographic characteristics of the study population	
Age (years)	50.0 ± 10.0
Gender	
Male	50.0%
Female	50.0%
Education (years)	12.0 ± 2.0
Marital status	
Married	80.0%
Single	20.0%
Occupation	
Professional	30.0%
Managerial	20.0%
Technical	10.0%
Skilled	20.0%
Unskilled	20.0%
Retired	10.0%
Family size	3.0 ± 1.0
Income (USD/month)	1,000.0 ± 500.0
Health status	
Good	70.0%
Fair	20.0%
Poor	10.0%




Physical characteristics		Chemical characteristics		Biological characteristics		Ecological characteristics	
Parameter	Value	Parameter	Value	Parameter	Value	Parameter	Value
Length (mm)	100	pH	7.5	Survival (%)	95	Abundance (ind/m ³)	100
Weight (g)	10	Temperature (°C)	25	Growth rate (g/g/d)	0.5	Diversity (H')	1.5
Color	White	Salinity (‰)	0	Reproduction (offspring/g)	10	Resilience (days)	30
Texture	Soft	Dissolved oxygen (mg/L)	8.0	Metabolism (mg O ₂ /g/h)	0.2	Stress tolerance (days)	60
Odor	Fresh	Ammonia (mg/L)	0.5	Enzyme activity (U/g)	0.1	Recovery time (days)	45
Taste	Sweet	Nitrite (mg/L)	0.2	Protein content (g/g)	1.0	Regeneration (days)	35
Smell	Neutral	Nitrate (mg/L)	1.0	Carbohydrate content (g/g)	0.5	Adaptation (days)	50
Appearance	Smooth	Total nitrogen (mg/L)	2.0	Lipid content (g/g)	0.2	Survival time (days)	70
Consistency	Viscous	Total phosphorus (mg/L)	0.5	Mineral content (g/g)	0.1	Recovery rate (%)	80
Flexibility	Brittle	Calcium (mg/L)	10.0	Vitamin content (g/g)	0.05	Regeneration rate (%)	75
Strength	Weak	Magnesium (mg/L)	5.0	Antioxidant activity (U/g)	0.05	Adaptation rate (%)	85
Stability	Unstable	Sulfate (mg/L)	20.0	Antibacterial activity (U/g)	0.05	Survival rate (%)	90
Durability	Short	Chloride (mg/L)	15.0	Antifungal activity (U/g)	0.05	Recovery rate (%)	85
Resilience	Low	Fluoride (mg/L)	0.5	Antiparasitic activity (U/g)	0.05	Regeneration rate (%)	75
Recovery	Slow	Iodine (mg/L)	0.1	Anticancer activity (U/g)	0.05	Adaptation rate (%)	85
Regeneration	Fast	Copper (mg/L)	0.05	Antiviral activity (U/g)	0.05	Survival rate (%)	90
Adaptation	High	Zinc (mg/L)	0.1	Anticoagulant activity (U/g)	0.05	Recovery rate (%)	85
Survival	Long	Iron (mg/L)	0.5	Antithrombotic activity (U/g)	0.05	Regeneration rate (%)	75
Recovery	Fast	Manganese (mg/L)	0.05	Antidiabetic activity (U/g)	0.05	Adaptation rate (%)	85
Regeneration	Fast	Selenium (mg/L)	0.01	Anticancer activity (U/g)	0.05	Survival rate (%)	90
Adaptation	High	Chromium (mg/L)	0.01	Antiviral activity (U/g)	0.05	Recovery rate (%)	85
Survival	Long	Cadmium (mg/L)	0.01	Anticoagulant activity (U/g)	0.05	Regeneration rate (%)	75
Recovery	Fast	Lead (mg/L)	0.01	Antithrombotic activity (U/g)	0.05	Adaptation rate (%)	85
Regeneration	Fast	Mercury (mg/L)	0.01	Antidiabetic activity (U/g)	0.05	Survival rate (%)	90
Adaptation	High	Barium (mg/L)	0.01	Anticancer activity (U/g)	0.05	Recovery rate (%)	85
Survival	Long	Strontium (mg/L)	0.01	Antiviral activity (U/g)	0.05	Regeneration rate (%)	75
Recovery	Fast	Yttrium (mg/L)	0.01	Anticoagulant activity (U/g)	0.05	Adaptation rate (%)	85
Regeneration	Fast	Zirconium (mg/L)	0.01	Antithrombotic activity (U/g)	0.05	Survival rate (%)	90
Adaptation	High	Niobium (mg/L)	0.01	Antidiabetic activity (U/g)	0.05	Regeneration rate (%)	75
Survival	Long	Molybdenum (mg/L)	0.01	Anticancer activity (U/g)	0.05	Recovery rate (%)	85
Recovery	Fast	Ruthenium (mg/L)	0.01	Antiviral activity (U/g)	0.05	Adaptation rate (%)	85
Regeneration	Fast	Rhodium (mg/L)	0.01	Anticoagulant activity (U/g)	0.05	Survival rate (%)	90
Adaptation	High	Palladium (mg/L)	0.01	Antithrombotic activity (U/g)	0.05	Regeneration rate (%)	75
Survival	Long	Silver (mg/L)	0.01	Antidiabetic activity (U/g)	0.05	Adaptation rate (%)	85
Recovery	Fast	Copper (mg/L)	0.01	Anticancer activity (U/g)	0.05	Survival rate (%)	90
Regeneration	Fast	Zinc (mg/L)	0.01	Antiviral activity (U/g)	0.05	Recovery rate (%)	85
Adaptation	High	Iron (mg/L)	0.01	Anticoagulant activity (U/g)	0.05	Regeneration rate (%)	75
Survival	Long	Manganese (mg/L)	0.01	Antithrombotic activity (U/g)	0.05	Adaptation rate (%)	85
Recovery	Fast	Selenium (mg/L)	0.01	Antidiabetic activity (U/g)	0.05	Survival rate (%)	90
Regeneration	Fast	Chromium (mg/L)	0.01	Anticancer activity (U/g)	0.05	Recovery rate (%)	85
Adaptation	High	Cadmium (mg/L)	0.01	Antiviral activity (U/g)	0.05	Adaptation rate (%)	85
Survival	Long	Lead (mg/L)	0.01	Anticoagulant activity (U/g)	0.05	Survival rate (%)	90
Recovery	Fast	Mercury (mg/L)	0.01	Antithrombotic activity (U/g)	0.05	Regeneration rate (%)	75
Regeneration	Fast	Barium (mg/L)	0.01	Antidiabetic activity (U/g)	0.05	Adaptation rate (%)	85
Adaptation	High	Strontium (mg/L)	0.01	Anticancer activity (U/g)	0.05	Survival rate (%)	90
Survival	Long	Yttrium (mg/L)	0.01	Antiviral activity (U/g)	0.05	Recovery rate (%)	85
Recovery	Fast	Zirconium (mg/L)	0.01	Anticoagulant activity (U/g)	0.05	Regeneration rate (%)	75



[illegible][illegible]

FIG. 8

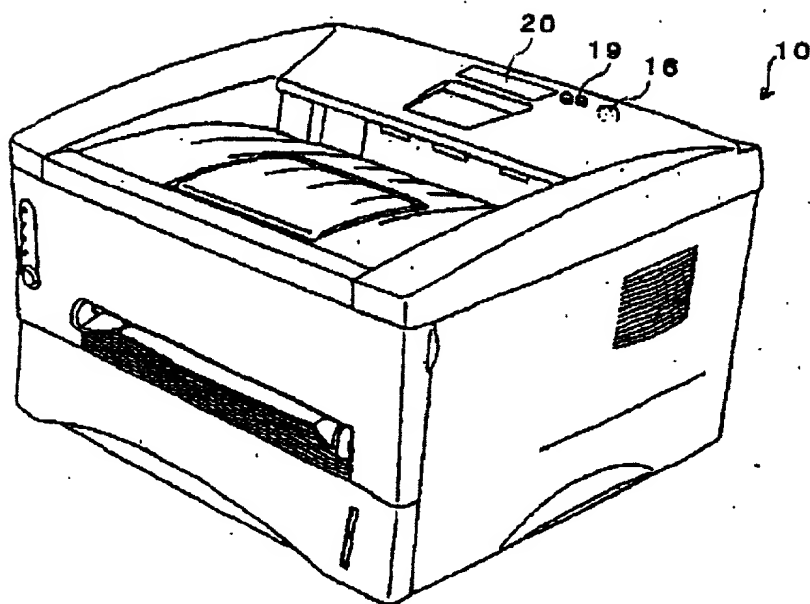

1. **Introduction**
 2. **Method**
 3. **Results**
 4. **Discussion**
 5. **Conclusion**
 6. **References**
 7. **Appendix**
 8. **Table 1**
 9. **Table 2**
 10. **Table 3**
 11. **Table 4**
 12. **Table 5**
 13. **Table 6**
 14. **Table 7**
 15. **Table 8**
 16. **Table 9**
 17. **Table 10**
 18. **Table 11**
 19. **Table 12**
 20. **Table 13**
 21. **Table 14**
 22. **Table 15**
 23. **Table 16**
 24. **Table 17**
 25. **Table 18**
 26. **Table 19**
 27. **Table 20**
 28. **Table 21**
 29. **Table 22**
 30. **Table 23**
 31. **Table 24**
 32. **Table 25**
 33. **Table 26**
 34. **Table 27**
 35. **Table 28**
 36. **Table 29**
 37. **Table 30**
 38. **Table 31**
 39. **Table 32**
 40. **Table 33**
 41. **Table 34**
 42. **Table 35**
 43. **Table 36**
 44. **Table 37**
 45. **Table 38**
 46. **Table 39**
 47. **Table 40**
 48. **Table 41**
 49. **Table 42**
 50. **Table 43**
 51. **Table 44**
 52. **Table 45**
 53. **Table 46**
 54. **Table 47**
 55. **Table 48**
 56. **Table 49**
 57. **Table 50**
 58. **Table 51**
 59. **Table 52**
 60. **Table 53**
 61. **Table 54**
 62. **Table 55**
 63. **Table 56**
 64. **Table 57**
 65. **Table 58**
 66. **Table 59**
 67. **Table 60**
 68. **Table 61**
 69. **Table 62**
 70. **Table 63**
 71. **Table 64**
 72. **Table 65**
 73. **Table 66**
 74. **Table 67**
 75. **Table 68**
 76. **Table 69**
 77. **Table 70**
 78. **Table 71**
 79. **Table 72**
 80. **Table 73**
 81. **Table 74**
 82. **Table 75**
 83. **Table 76**
 84. **Table 77**
 85. **Table 78**
 86. **Table 79**
 87. **Table 80**
 88. **Table 81**
 89. **Table 82**
 90. **Table 83**
 91. **Table 84**
 92. **Table 85**
 93. **Table 86**
 94. **Table 87**
 95. **Table 88**
 96. **Table 89**
 97. **Table 90**
 98. **Table 91**
 99. **Table 92**
 100. **Table 93**
 101. **Table 94**
 102. **Table 95**
 103. **Table 96**
 104. **Table 97**
 105. **Table 98**
 106. **Table 99**
 107. **Table 100**
 108. **Table 101**
 109. **Table 102**
 110. **Table 103**
 111. **Table 104**
 112. **Table 105**
 113. **Table 106**
 114. **Table 107**
 115. **Table 108**
 116. **Table 109**
 117. **Table 110**
 118. **Table 111**
 119. **Table 112**
 120. **Table 113**
 121. **Table 114**
 122. **Table 115**
 123. **Table 116**
 124. **Table 117**
 125. **Table 118**
 126. **Table 119**
 127. **Table 120**
 128. **Table 121**
 129. **Table 122**
 130. **Table 123**
 131. **Table 124**
 132. **Table 125**
 133. **Table 126**
 134. **Table 127**
 135. **Table 128**
 136. **Table 129**
 137. **Table 130**
 138. **Table 131**
 139. **Table 132**
 140. **Table 133**
 141. **Table 134**
 142. **Table 135**
 143. **Table 136**
 144. **Table 137**
 145. **Table 138**
 146. **Table 139**
 147. **Table 140**
 148. **Table 141**
 149. **Table 142**
 150. **Table 143**
 151. **Table 144**
 152. **Table 145**
 153. **Table 146**
 154. **Table 147**
 155. **Table 148**
 156. **Table 149**
 157. **Table 150**
 158. **Table 151**
 159. **Table 152**
 160. **Table 153**
 161. **Table 154**
 162. **Table 155**
 163. **Table 156**
 164. **Table 157**
 165. **Table 158**
 166. **Table 159**
 167. **Table 160**
 168. **Table 161**
 169. **Table 162**
 170. **Table 163**
 171. **Table 164**
 172. **Table 165**
 173. **Table 166**
 174. **Table 167**
 175. **Table 168**
 176. **Table 169**
 177. **Table 170**
 178. **Table 171**
 179. **Table 172**
 180. **Table 173**
 181. **Table 174**
 182. **Table 175**
 183. **Table 176**
 184. **Table 177**
 185. **Table 178**
 186. **Table 179**
 187. **Table 180**
 188. **Table 181**
 189. **Table 182**
 190. **Table 183**
 191. **Table 184**
 192. **Table 185**
 193. **Table 186**
 194. **Table 187**
 195. **Table 188**
 196. **Table 189**
 197. **Table 190**
 198. **Table 191**
 199. **Table 192**
 200. **Table 193**
 201. **Table 194**
 202. **Table 195**
 203. **Table 196**
 204. **Table 197**
 205. **Table 198**
 206. **Table 199**
 207. **Table 200**
 208. **Table 201**
 209. **Table 202**
 210. **Table 203**
 211. **Table 204**
 212. **Table 205**
 213. **Table 206**
 214. **Table 207**
 215. **Table 208**
 216. **Table 209**
 217. **Table 210**

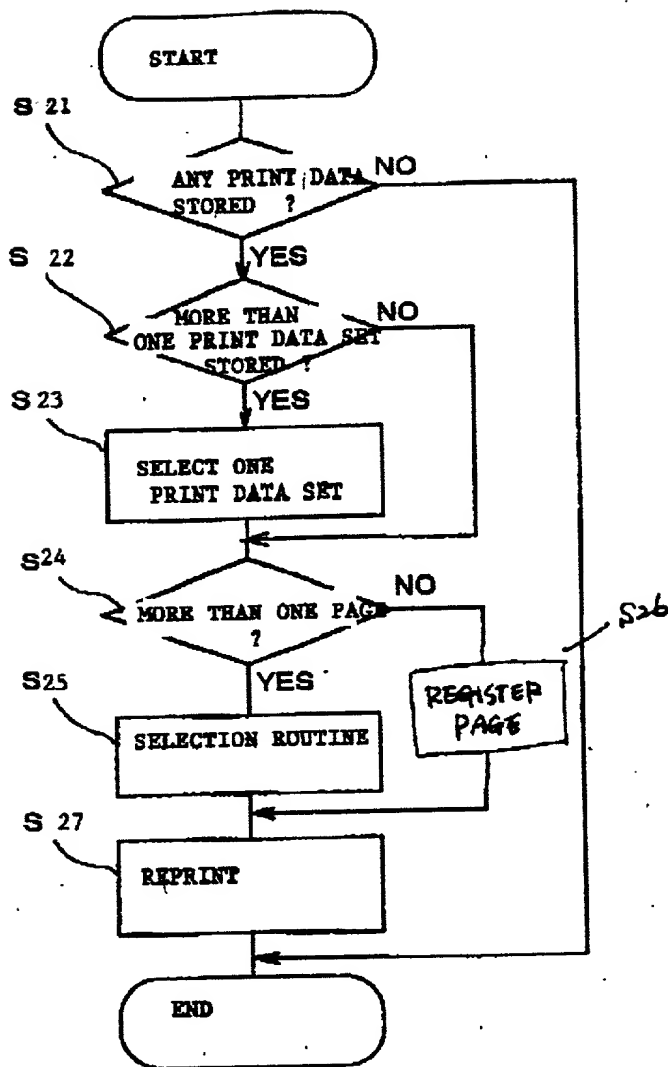


Table 1. Demographic and clinical characteristics of the study population	
Demographic characteristics	
Age (mean \pm SD)	65.2 \pm 10.5
Gender (male/female)	102/108
Education (years)	12.5 \pm 2.1
Marital status (married/divorced/widowed)	150/40/18
Occupation (retired/employed)	150/40
Income (monthly, \$)	1,200 \pm 300
Clinical characteristics	
Duration of illness (years)	10.5 \pm 5.2
Current treatment (medication/therapy)	150/40
Comorbidities (hypertension/diabetes/cholesterol)	120/80/60
Quality of life (SF-36 score)	45.2 \pm 12.5


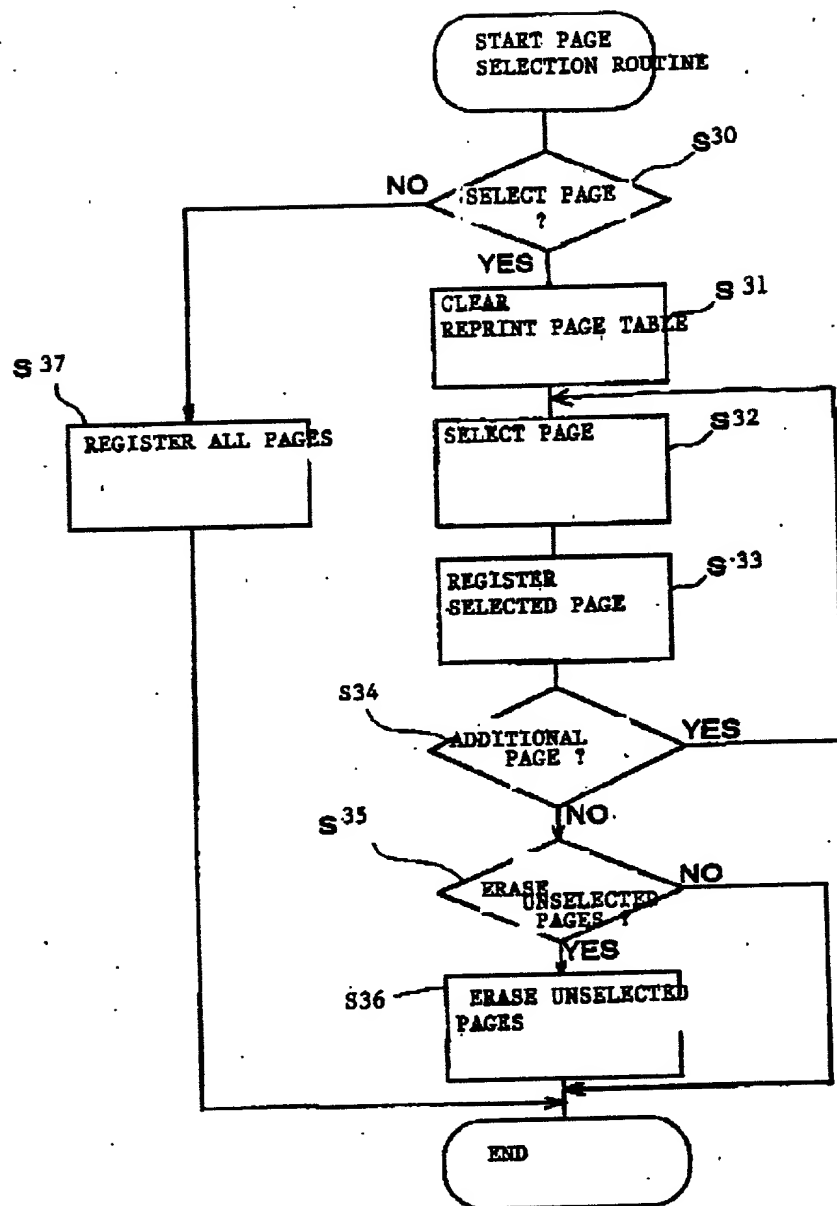


FIG. 12

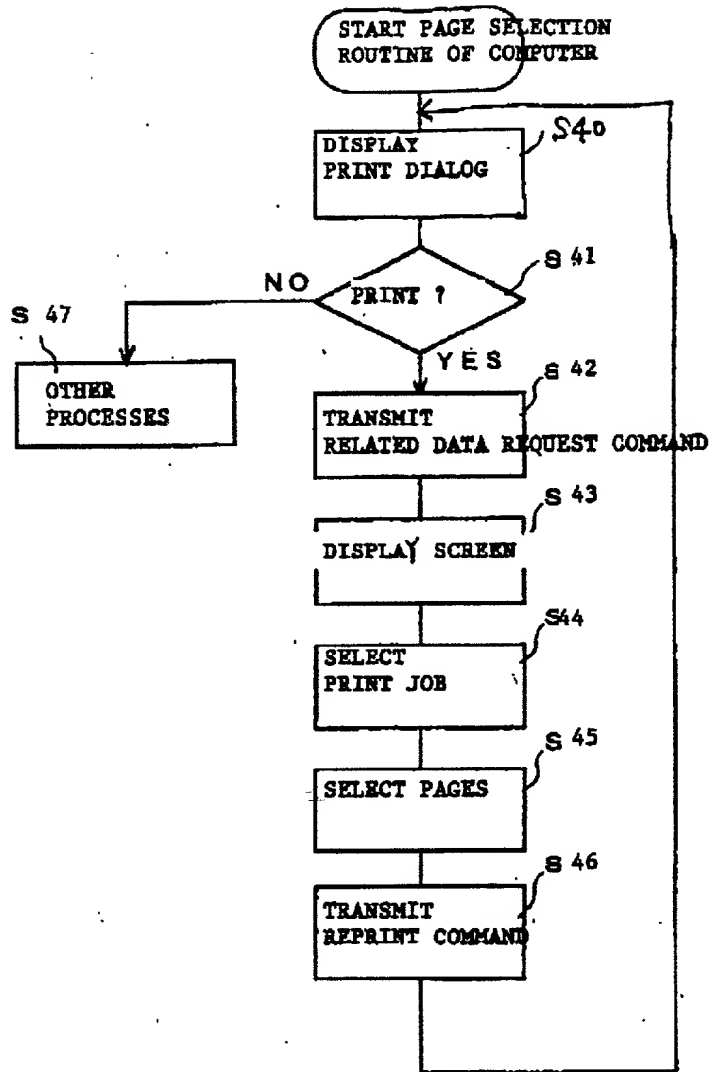

000000" 62905950

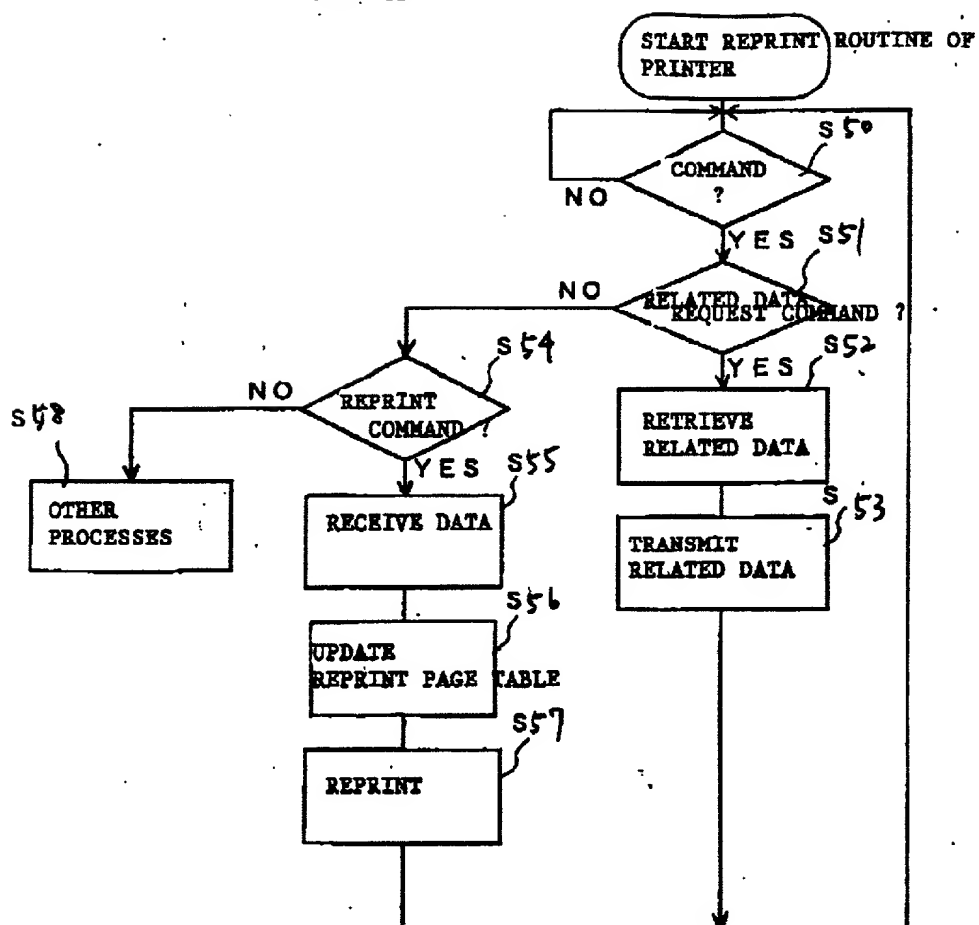
[illegible]

FIG. 14


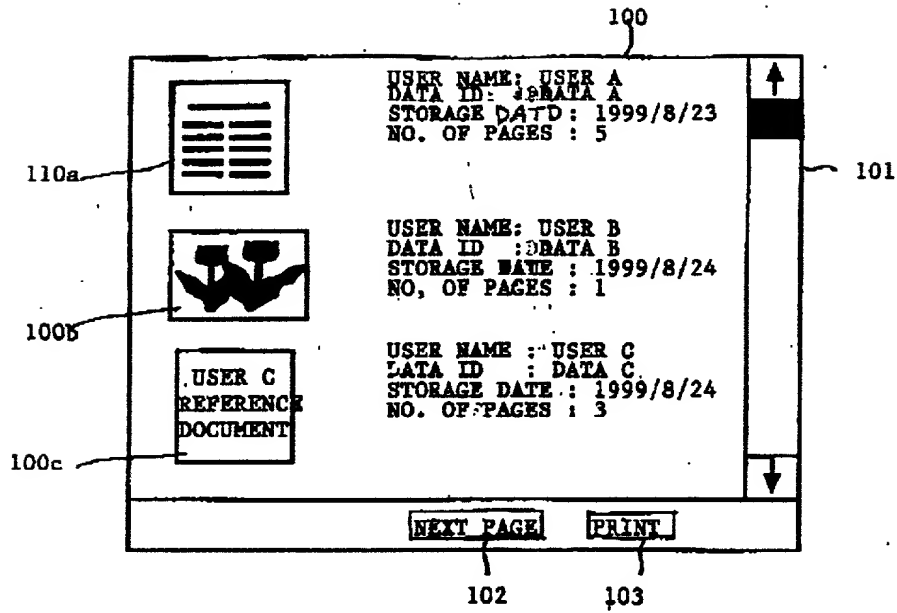


FIG. 15

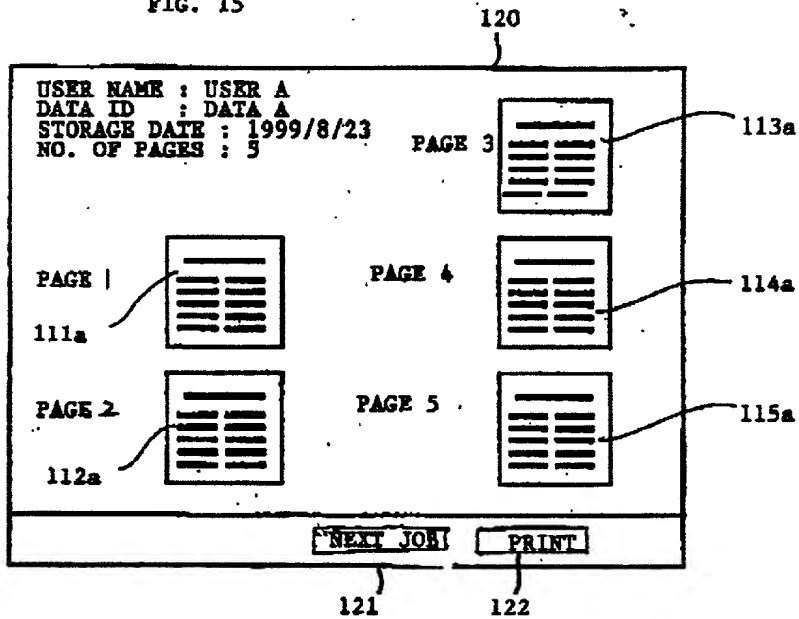

Japanese Language Declaration

私の住所、郵便の宛先および因縁は、下欄に氏名に続いて記載したとおりであり、下記名称の発明に関し、請求の範囲に記載した特許を求める主題の本来の、最初にして唯一の発明者である（一人の氏名のみが下欄に記載されている場合）か、もしくは本来の、最初にして共同の発明者である（複数の氏名が下欄に記載されている場合）と信じ、

My residence, post office address and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

I hereby claim foreign priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate listed below and/or any U.S. provisional application(s) listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Variable	Group 1		Group 2		Group 3		Group 4		Group 5		Group 6		Group 7		Group 8		Group 9		Group 10		
	Mean	SD	Mean	SD	Mean	SD	Mean	SD	Mean	SD	Mean	SD	Mean	SD	Mean	SD	Mean	SD	Mean	SD	
Age	25.5	3.2	26.1	3.5	25.8	3.1	26.3	3.4	25.9	3.3	26.2	3.6	25.7	3.2	26.0	3.4	25.6	3.1	26.4	3.5	
Height	175.2	5.1	176.8	5.3	174.5	5.0	177.1	5.2	175.9	5.1	176.3	5.4	174.7	5.0	176.6	5.2	175.4	5.1	176.9	5.3	
Weight	72.3	8.5	73.8	8.7	71.5	8.4	74.2	8.6	72.9	8.5	73.5	8.8	71.7	8.4	73.9	8.6	72.6	8.5	74.1	8.7	
Heart rate	72.1	8.2	73.5	8.4	71.8	8.1	74.0	8.3	72.4	8.2	73.2	8.5	71.6	8.1	73.7	8.3	72.0	8.2	73.9	8.4	
Blood pressure	118.5	12.1	119.2	12.3	117.8	12.0	119.5	12.2	118.1	12.1	118.9	12.4	117.6	12.0	119.1	12.2	118.3	12.1	119.4	12.3	
Respiratory rate	16.2	2.1	16.5	2.2	16.0	2.0	16.7	2.1	16.3	2.1	16.4	2.3	16.1	2.0	16.6	2.1	16.2	2.1	16.8	2.2	
SpO ₂	97.5	1.2	97.8	1.3	97.3	1.1	97.9	1.2	97.6	1.2	97.7	1.4	97.4	1.1	97.8	1.2	97.5	1.2	97.9	1.3	
Temperature	36.8	0.2	36.9	0.2	36.7	0.2	37.0	0.2	36.8	0.2	36.9	0.3	36.7	0.2	36.9	0.2	36.8	0.2	37.0	0.2	
ECG	Normal	95.2	2.1	Normal	96.1	2.2	Normal	94.8	2.0	Normal	95.5	2.3	Normal	94.9	2.1	Normal	95.7	2.2	Normal	96.0	2.3
ECG	Abnormal	4.8	2.1	Abnormal	3.9	2.2	Abnormal	5.2	2.0	Abnormal	4.5	2.3	Abnormal	5.1	2.1	Abnormal	4.3	2.2	Abnormal	4.0	2.3
ECG	Normal	95.2	2.1	Normal	96.1	2.2	Normal	94.8	2.0	Normal	95.5	2.3	Normal	94.9	2.1	Normal	95.7	2.2	Normal	96.0	2.3
ECG	Abnormal	4.8	2.1	Abnormal	3.9	2.2	Abnormal	5.2	2.0	Abnormal	4.5	2.3	Abnormal	5.1	2.1	Abnormal	4.3	2.2	Abnormal	4.0	2.3
ECG	Normal	95.2	2.1	Normal	96.1	2.2	Normal	94.8	2.0	Normal	95.5	2.3	Normal	94.9	2.1	Normal	95.7	2.2	Normal	96.0	2.3
ECG	Abnormal	4.8	2.1	Abnormal	3.9	2.2	Abnormal	5.2	2.0	Abnormal	4.5	2.3	Abnormal	5.1	2.1	Abnormal	4.3	2.2	Abnormal	4.0	2.3
ECG	Normal	95.2	2.1	Normal	96.1	2.2	Normal	94.8	2.0	Normal	95.5	2.3	Normal	94.9	2.1	Normal	95.7	2.2	Normal	96.0	2.3
ECG	Abnormal	4.8	2.1	Abnormal	3.9	2.2	Abnormal	5.2	2.0	Abnormal	4.5	2.3	Abnormal	5.1	2.1	Abnormal	4.3	2.2	Abnormal	4.0	2.3
ECG	Normal	95.2	2.1	Normal	96.1	2.2	Normal	94.8	2.0	Normal	95.5	2.3	Normal	94.9	2.1	Normal	95.7	2.2	Normal	96.0	2.3
ECG	Abnormal	4.8	2.1	Abnormal	3.9	2.2	Abnormal	5.2	2.0	Abnormal	4.5	2.3	Abnormal	5.1	2.1	Abnormal	4.3	2.2	Abnormal	4.0	2.3
ECG	Normal	95.2	2.1	Normal	96.1	2.2	Normal	94.8	2.0	Normal	95.5	2.3	Normal	94.9	2.1	Normal	9				

[illegible]

James A. Oliff, Reg. No. 27,075; William P. Berridge, Reg. No. 30,024;
Kirk M. Hudson, Reg. No. 27,562; Thomas J. Pardini, Reg. No. 30,411;
Edward P. Walker, Reg. No. 31,450; Robert A. Miller, Reg. No. 32,771 and
Mario A. Costantino, Reg. No. 33,565

OLIFF & BERRIDGE
P. O. BOX 19928
ALEXANDRIA, VIRGINIA 22320
USA
Telephone: (703) 836-6400

Full name of sole or first inventor/単独または第一発明者の氏名 Naoki HASHIMOTO		Date/日付 Aug. 28, 2000
Inventor's signature/発明者の署名 Naoki Hashimoto		
Residence/住所 Nagoya-shi, Aichi-ken, Japan		
Citizenship/国籍 Japanese		
Post Office Address/郵便先 c/o BROTHER KOGYO KABUSHIKI KAISHA 15-1 Nacshiro-cho, Minuho-ku, Nagoya-shi, Aichi-ken, 467-8561 Japan		
Full name of second joint inventor (if any)/第二共同発明者の氏名(適用する場合) Toru TSUZUKI		
Second inventor's signature/第二発明者の署名 Toru Tsuzuki		Date/日付 Aug. 28, 2000
Residence/住所 Okazaki-shi, Aichi-ken, Japan		
Citizenship/国籍 Japanese		
Post Office Address/郵便先 c/o BROTHER KOGYO KABUSHIKI KAISHA 15-1 Nacshiro-cho, Minuho-ku, Nagoya-shi, Aichi-ken, 467-8561 Japan		

第三又はそれ以後の発明者等であっても前記の発明者及び権利を主張すること。